

# Planning Committee 16 February 2017 - C/5005/16/CC Chesterton Cycle Bridge - Plan 2 General Arrangement Plan

**Materials**


All steelwork to be painted BS 4800 - 16 C 33 "Duck egg blue" unless otherwise noted

Internal triangular faces of parapet to be painted BS 4800 - 22 B 15 "Pearl grey"

All elements of fall protection including perforated parapet panels to be grade 316 stainless steel, Bead Blasted finish.

Cycle deck to be finished with resin bonded aggregate surface; Chinese Bauxite, aggregate size 0.9-1.4mm

Pedestrian deck and approach ramp surface to be finished with resin bonded aggregate surface; Guyanan Bauxite, aggregate size, 0.9-1.4mm

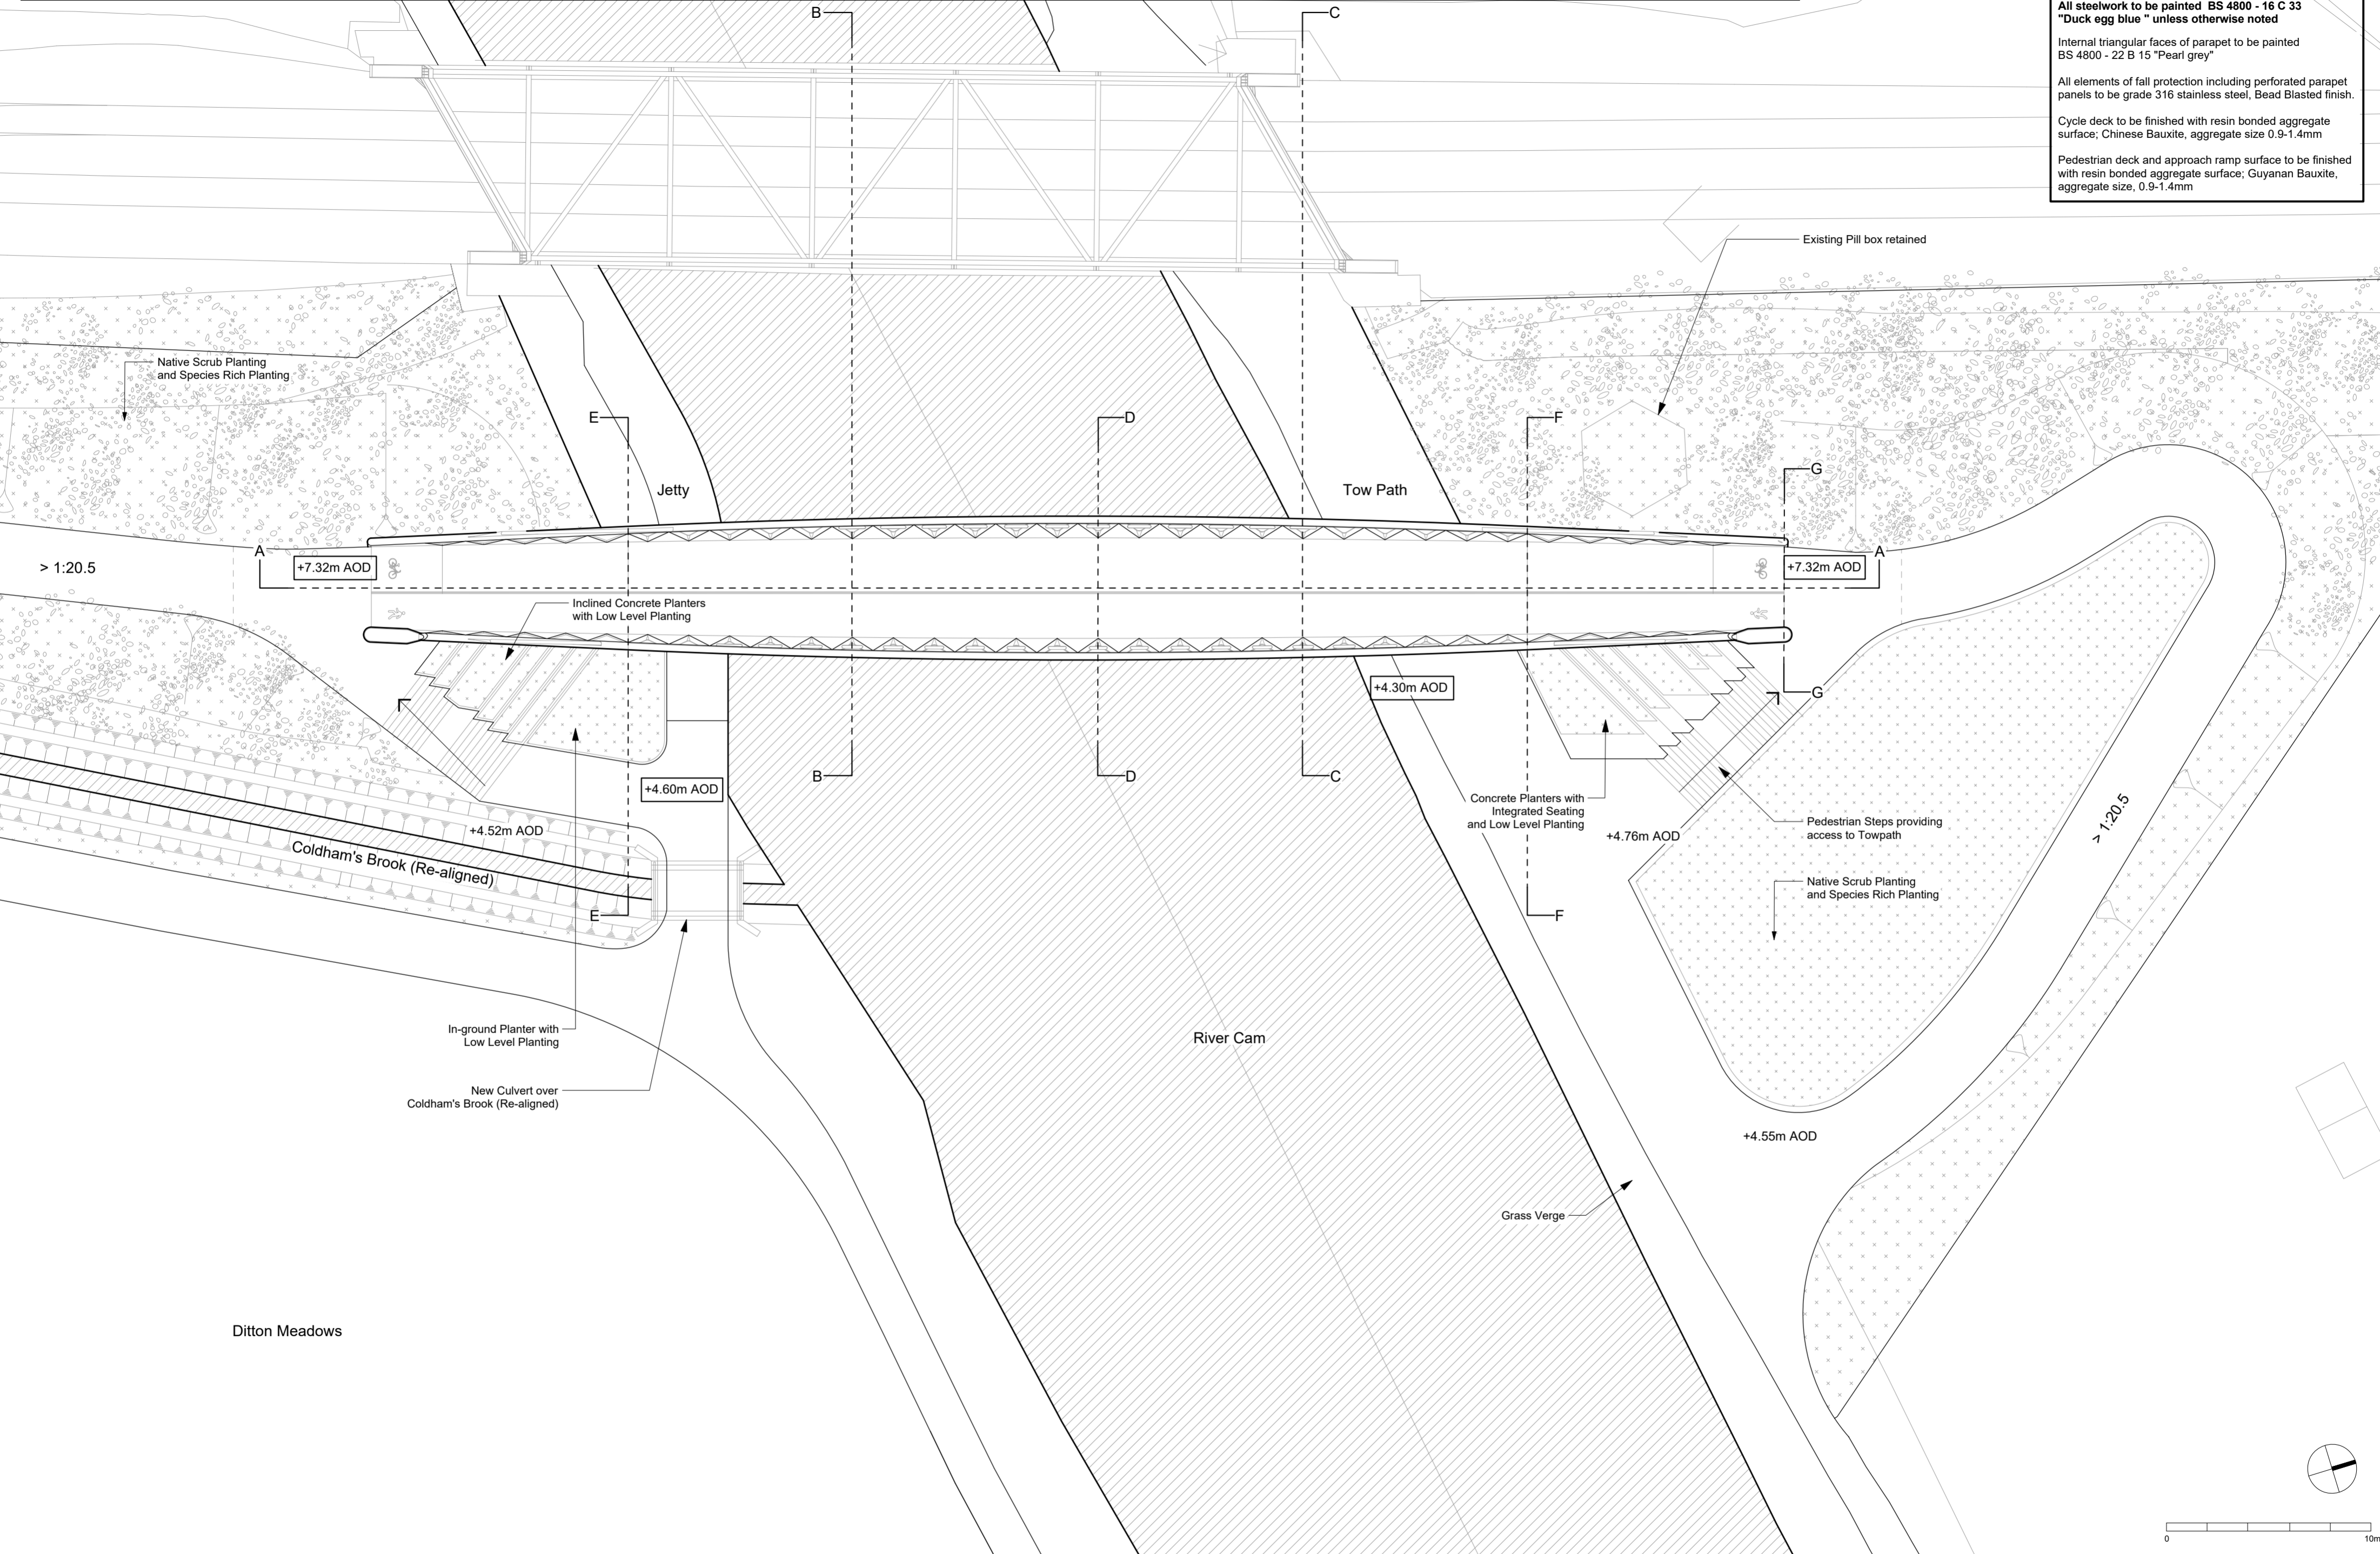

Rev.	Date	Comments
0	10/06/2016	Issued for planning

Not for Construction  
Do Not Scale Except for Planning Purposes

© Copyright Knight Architects Limited 2016

Knight Architects Limited  
Plumtree House  
3 Castle Street  
High Wycombe  
Bucks HP13 6RZ  
Telephone: 01494 525 500  
Email: info@knightarchitects.co.uk www.knightarchitects.co.uk

Project: Abbey / Chesterton Foot and Cycle Bridge  
Gearing/Gear/County Council  
Work Stage / Status: Planning  
Date: June 2016

Scale: 1:200 at A2  
Drawing Title: GA Plan  
Drawing Number: KA082/TPA/102

Abbey / Chesterton Foot and Cycle Bridge  
Revision: 0

**SKANSKA** **KA**

